

# X-FLOW AQUAFLEX 64 ULTRAFILTRATION MEMBRANE

## MEMBRANE ELEMENT DATASHEET

8" AQUAFLEX 64 PVC 0.9mm UFCLE  
ARTICLE CODE : 23E1FL895H

### GENERAL INFORMATION

Aquaflex 64 is an ultrafiltration module, used for production of process and potable water. Typical applications are the filtration of surface water, potable water and WWTP effluent. Mode of operation is feed-and-bleed with a minor crossflow or dead-end mode with regular backwash (permeate only) and chemically enhanced backwash.

### GENERAL SOLVENT RESISTANCE

Since the resistance of the membrane to solvents strongly depends on the actual process conditions, the indications given below should only be considered as guideline.

Acids	++
Bases	++
Organic esters, ketones, ethers	-
Aliphatic alcohols	+
Aliphatic hydrocarbons	+
Halogenated hydrocarbons	--
Aromatic hydrocarbons	--
Polar organic solvents	--
Oils	++

### CLEANING CHEMICAL RESISTANCE

#### Sodium Hypochlorite

- Typical 200 ppm, at  $\leq 40$  °C at  $\geq$  pH 10
- Maximum 500 ppm
- 250.000 ppm hours cumulative; pH 11

#### Chlorine Dioxide

- Typical 1 ppm, at  $\leq 40$  °C
- Maximum 2 ppm
- 90.000 ppm hours cumulative; pH 11

#### Hydrogen Peroxide

- Typical 200 ppm, at  $\leq 40$  °C
- Maximum 500 ppm
- 350.000 ppm hours cumulative

Note:

The above figures for oxidant contact represent the membrane resistance to each individual oxidizing agent. The total combined exposure for Sodium Hypochlorite and Chlorine Dioxide will be calculated as follows:

Combined exposure  $[NaOCl + ClO_2] = 2.6 \times$   
Exposure to  $ClO_2$  (in ppm hours) + Exposure to  $NaOCl$  (in ppm hours)  $< 250.000$  ppm hours

As a good working practice and in order to maximise the lifetime of the membrane it is advised to reduce the membrane exposure to oxidising agents to a minimum. Exposure limits are also affected by temperature, pH and the presence of metals. In order not to exceed maximum exposure limits, membranes must be preserved free of any oxidising agent when the plant is stopped.

#### Acids

Hydrochloric Acid	++
Nitric Acid	++
Sulphuric Acid	++
Phosphoric Acid	++
Acetic Acid	++
Citric Acid	++

pH > 2 during filtration  
pH > 1 during cleaning

#### Bases


Sodium Hydroxide (<4%)	++
Potassium Hydroxide (<4%)	++

pH < 12 during filtration  
pH < 13 during cleaning

### MEMBRANE CHARACTERISTICS

- Hydrophilic membrane composed of a blend of polyvinylpyrrolidone and polyethersulfone
- A nominal pore size of 20 nm.
- Structure asymmetric/microporous
- High performance and a very good anti-fouling behaviour
- Typical permeate quality SDI < 3, turbidity < 0,1 NTU
- Typical virus retention of > LOG 4 (MS2 colifages)
- Typical bacteria retention of > LOG 6 (Pseudomonas diminuta)

Membrane Diameter [mm/inch]	Membrane area [m <sup>2</sup> /ft <sup>2</sup> ]	Feed connection D <sub>0</sub> [mm/Inch]	Module length L <sub>0</sub> [mm/Inch]	Permeate connection d <sub>0</sub> [mm/Inch]
0.9 [35]	64 [687]	220.0 [8.66]	1537.5 [60.51]	42.6 [1.68]

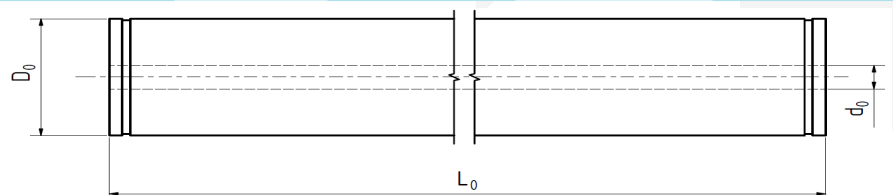

# X-FLOW AQUAFLEX 64

## ULTRAFILTRATION MEMBRANE

### MEMBRANE ELEMENT DATASHEET

#### OPERATING SPECIFICATIONS

Max. system pressure	Max. trans-membrane pressure	Max. backflush pressure	Temp. range
[kPa/psi]	[kPa/psi]	[kPa/psi]	[°C/°F]
300 [43]	300 [43]	300 [43]	0-40 [32-104]

- Backwash water should be free of particulates and should be of UF permeate quality or better.
- Backwash pumps should preferably be made of non-corroding materials, e.g., plastic or stainless steel. If compressed air is used to pressurize the backwash water, do not allow a two-phase air/water mixture to enter the element.
- To avoid mechanical damage, do not subject the membrane module or element to sudden temperature changes, particularly decreasing. Bring the module or element back to ambient operating temperature slowly (max. value 3 °C/min). Failure to adhere to this guideline can result in irreparable damage.

Operation of membrane modules at any combination of maximum limits of pH, concentration, pressure or temperature, during cleaning or production, will influence the membrane lifetime.

#### TECHNICAL SPECIFICATIONS

##### Weight Specifications

Dry weight of membrane element  
ca. 34 kg [75 lbs]

Membrane element filled with water  
ca. 66 kg [145 lbs]

##### Materials of Construction

Housing	PVC white
Flow distributor	PVC/PP
Potting	PU resin
Membrane	PES/PVP

#### CONNECTION SPECIFICATIONS



- Feed side, standard 8" (219.1 mm) grooved coupling with gaskets
- Permeate side, Endcap axial, connected with standard 2½" (73.0 mm) grooved clamps with gaskets. O-rings for permeate connector of the axial end cap: 35 x 4 mm (NBR or EPDM)

A (EPDM) FlushSeal® gasket is advised with the couplings (although a standard C-shaped gasket can also be used).

Assembly of module including end caps, blind connector and O-rings can be ordered under article no. S-23E1FL295H. The same package with grooved couplings can be ordered under article no. S2-23E1FL295H.

#### CERTIFICATIONS

- USA: ANSI/NSF, Standard 61 (pending)
- UK: DWI Regulation 31 (pending)
- France: ACS (pending)
- Germany: KTW and DVGW (pending)
- The Netherlands: KIWA ATA

##### Process Characteristics (Water, 20 °C)

Hydraulic membrane diameter	Crossflow flow rate (*)	Pressure-drop across module at 1 m/s	Pressure-drop across module at 2 m/s
[mm/in]	[m³/h/gpm]	[kPa/psi]	[kPa/psi]
0.9 [35]	27.5 x v [37 x v]	72 [10]	150 [21]

(\*) superficial velocity (v) in m/s [ft/s]

# X-FLOW AQUAFLEX 64

## ULTRAFILTRATION MEMBRANE

### MEMBRANE ELEMENT DATASHEET

---

#### STORAGE

---

New membrane modules can be stored as supplied in the original packaging. The membrane elements contain an aqueous preservation solution of glycerine (20wt%) and sodium metabisulfite (1wt%).

Membrane modules should be stored in a dry, normally ventilated place, away from sources of heat, ignition and direct sunlight. Store between 0 and 40 °C.

The membrane modules should not be subjected to any freezing temperatures.

Shelf life is a maximum of 6 months for unused modules in unopened packaging under correct storage conditions after transfer of ownership for X-Flow B.V. to the Client. After the maximum period of 6 months all warranties are null and void unless otherwise agreed in writing between the parties.

After use, the UF membrane modules need to be stored wet at all times. To avoid biological growth during shutdowns or storage, wet membranes could be treated with a compatible biocide. The membrane is compatible with many common disinfecting agents or biocidal preservatives.

Typically for short-term shutdowns (1 – 7 days), a daily backwash with UF permeate quality water for 30 seconds at 215 l/mh, should be adequate for bacteria control. Before start of the shutdown period, the modules must be cleaned by a standard Chemical Enhanced Backwash (CEB).

In case of long-term storage (> 7 days), membranes should be disinfected. The membranes should be cleaned using a CEB before the disinfection step is carried out. For disinfection, a 0,5% sodium metabisulfite solution can be used. In both short and long term storage situations, the modules should remain filled with storage solution



#### X-FLOW BV

P.O. BOX 739, 7500 AS ENSCHEDE, NETHERLANDS [WWW.X-FLOW.COM](http://WWW.X-FLOW.COM)

Note: The information and data contained in this document are based on our general experience and are believed to be correct. They are given in good faith and are intended to provide a guideline for the selection and use of our products. Since the conditions under which our products may be used are beyond our control, this information does not imply any guarantee of final product performance and we cannot accept any liability with respect to the use of our products. The quality of our products is guaranteed under our conditions of sale. Existing industrial property rights must be observed.  
DS Aquaflex SPG-55 E-49/13 © 2013 Pentair, Inc. All Rights Reserved.

